



## MONOCRYSTALLINE SILICON MODULE

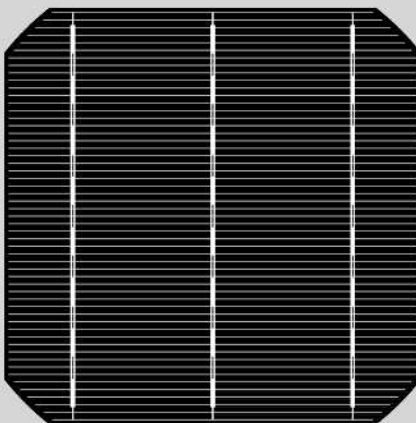

**5** years  
products  
warranty

**25** year  
power output  
warranty

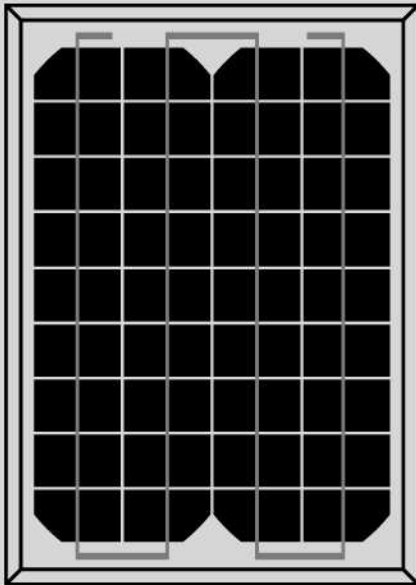

# M6-10

## MONOCRYSTALLINE SILICON MODULE

### Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(2400pa).



High salt and ammonia resistance



Positive power tolerance: 0-+5w

### Warranty

- 5 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

### Comprehensive Certificates

- ISO 9001:2008: Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUV Certificate




## Fortune CP Ltd

Regus House, Admirals Park, Dartford, Kent, DA2 6QD


Tel: (44) 1322303070, Fax (44) 1322303072

Email: [sales@fortunecp.co.uk](mailto:sales@fortunecp.co.uk) Website: [www.fortunecp.com](http://www.fortunecp.com)

### Engineering Drawings (Front Side)

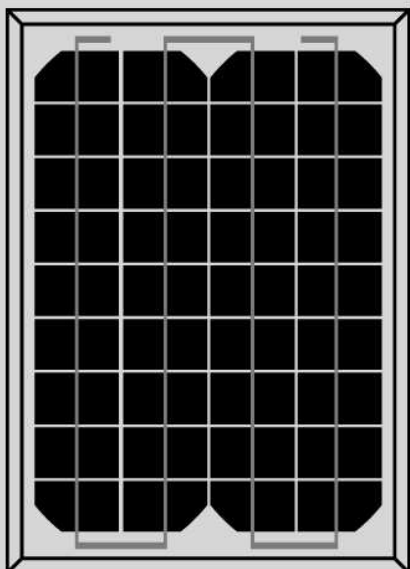

### Engineering Drawings (Back Side)

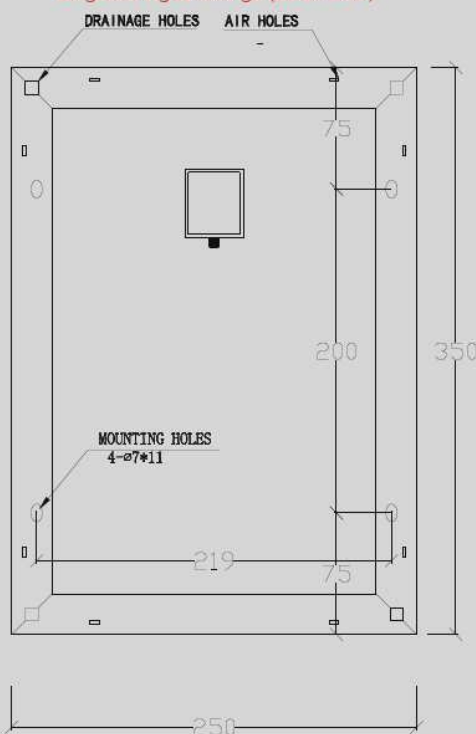

## Raw materials and Mechanical Parameters

M6-10	
Type of Cells(mm)	mono52 × 31.2
NO. of Cells and Connections	4 × 9=36
Dimensions(mm)(L*W*H)	350 × 250 × 25
Weight(kg)	1.2
Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer Composite
Aluminium-Frame	Silvery/Black Anodized aluminium alloy
Junction-Box	IP65
Cable	NA, but customized is acceptable
Connector	NA, but MC4 and MC4 Compatible are acceptable
Package Configuration	20pcs/ctn

## Performance Parameters

M6-10	
Maximum System Voltage	700V
Operating Temperature	-45~+80°C
Maximum Series Fuse	/
Maximum Static Load, Front Side (e.x. Snow, Wind)	2400Pa
Maximum Static Load, Back Side (e.x. Wind)	2400Pa
Application Grade	Class A

## Electrical Parameters (Standard Test Condition)

M6-10	
Rated Maximum Power(Mp)	10W
Power Tolerance	0~+5W
Cell Efficiency	17.6%
Open Circuit Voltage(Voc)	22.6V
Maximum Power Voltage(Vmp)	17.6V
Short Circuit Current(Isc)	0.61A
Maximum Power Current(Imp)	0.57A
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.32%
Temperature Coefficient of Pmp	-0.45%
Standard Test Condition	Irradiance:1000W/M2, Cell Temperature:25°C, Spectrum AM:1.5

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.

## Fortune CP Ltd

Regus House, Admirals Park, Dartford, Kent, DA2 6QD

Tel: (44) 1322303070, Fax (44) 1322303072

Email: [sales@fortunecp.co.uk](mailto:sales@fortunecp.co.uk) Website: [www.fortunecp.com](http://www.fortunecp.com)